


Produktinformation

Temperature Sensor
7131

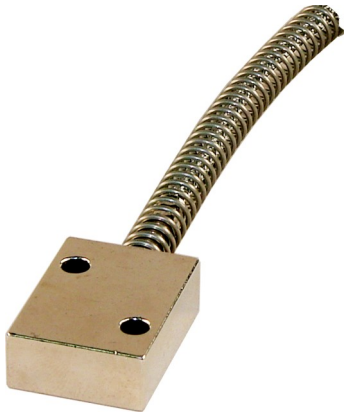

Characteristics

- Thermocouple Fe-CuNi (type J); NiCr-Ni (type K)
- RTD Pt100, class B
- Surface sensor
- Sensor case brass nickel plated
- Cable type flexible fiberglass insulation with steel wire braiding or Teflon-Silicon-insulation

Ordering code

1. 2. 3. 4. 5. 6.
□ - □ - □ - □ - □ - □

1.	Measuring element	
	7131	Pt100 class B
2.	Number of elements	
	1	
	2	
3.	Connection type	
	2L	2-wire (standard)
	3L	3-wire
	4L	4-wire
4.	Cable length (please state in clear text)	
	2000	cable length in mm standard
	XXXX	custom length in mm; price/m
5.	Operating temperature	
	400°C	fiberglass insulation

Stock

7131-1-2L-2000-400°C

Dimensions

