

Produktinformation


Temperature Sensor 7132



Characteristics

- Thermocouple Fe-CuNi (type J); NiCr-Ni (type K)
- RTD Pt100, class B
- Protective tube stainless steel 1.4571 perforated
- Measuring tip plane
- Cable type flexible fiberglass insulation with steel wire braiding or Teflon-Silicon-insulation

Dimensions

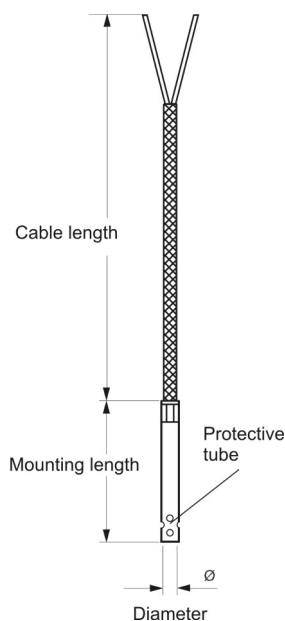

Accessories

Description

Displacement adapter G 1/8
incl. nut suitable for
protective tube diameter 5 mm

Ordering code

SV1805

Ordering code

1. 2. 3. 4. 5. 6. 7. 8. 9.
□ - □ - □ - □ - □ - □ - □ - □ - □

1. Measuring element	
7132	Pt100 class B
2. Number of elements	
1	
3. Connection type	
2L	2-wire
4. Probe diameter	
5	5 mm
5. Fitting length EL	
50	50 mm
100	100 mm
xx	custom length; specify the length in mm in the plain text
6. Cable length (please state in clear text)	
2000	Cable length in mm standard
XXXX	custom length in mm; price/m
7. Operating temperature	
400°C	Fiberglass insulation

Stock

7132-1-2L-5-50-2000-400°C
7132-1-2L-5-100-2000-400°C